

LED Module Clio G2

- Fits well in slim ceiling luminaires up to 550mm in diameter
- Easy and flexible installation
- Shadow free, homogeneous light diffusion and 100% light instant on
- High efficacy up to 100 lm/W
- Integrated driver, connects directly to 220-240V
- Including magnets and connection box
- Movement detector accessory available for 12W & 16W

See appendix 1 for dimmer compatibility list

Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level	Weight (kg/pc)
140066207	LED E C module 36W DIM 4000K Clio CT	CFL TC-DD/PL-Q 38W	36	3000	83	4000	A+	0.49

Accessories



140060553
LED Module sensor CT

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060553	LED Module sensor CT	40x35x80	0.06	6945730491732	1
140060553	LED Module sensor CT	183x87x87	0.58	6945730441720	10
140066207	LED E C module 36W DIM 4000K Clio CT	324x35x324	0.61	6945730472342	20

Technical Specifications


Lifespan (L70B50)	30,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	100,000
Dimmable	Yes (22W/36W)
Beam angle	150 °
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Control gear included	Yes

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V
	AC
DC input voltage	No


Ambient Conditions

Operating temperature	-20 ~ 40 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C



Dimensional Drawing (mm)

LED E C module 36W

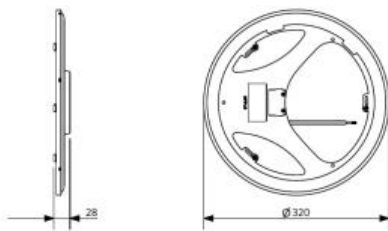

LED Module sensor CT

