



LED Ceiling Light Apollo

- NEW: 22W dimmable version available
- NEW: bracket accessory for easy mounting on existing installations (no new screw holes needed)
- Easy installation on wall or ceiling
- LED Module Clio inside (12W and 16W)
- Uniform, diffused light, creating a pleasant atmosphere
- IP44 versions also suitable for bathrooms and comparable spaces
- Energy saving up to 80% in comparison to a traditional light source



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level	Weight (kg/pc)
520020000200	LED HC300 12W 4000K Apollo III	GLS 75W	12	1100	91	4000	A+	0.43

See appendix 1 for dimmer compatibility list

Accessories



140060553
LED Module sensor CT



520098000200
LED Apollo HC300 bracket

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060553	LED Module sensor CT	40x35x80	0.06	6945730491732	1
140060553	LED Module sensor CT	183x87x87	0.58	6945730441720	10
520020000200	LED HC300 12W 4000K Apollo III	336x95x336	0.93	6956321807177	1
520098000200	LED Apollo HC300 bracket	234x86x49	0.44	6956321815387	1

Technical Specifications

Lifespan (L70B50)	30,000 h
Lifespan (L80B50)	20,000 h
On-/Off-cycles	100,000
Dimmable	No
Beam angle	120 °
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	I
Risk group	RG0
Control gear included	Yes

Electrical Supply


Frequency	50/60 Hz
Nominal voltage	220-240 V
	AC
DC input voltage	No

Mechanical Properties

Material housing	Steel
Optical material	Polycarbonate


Ambient Conditions

Operating temperature	-20 ~ 45 °C
Application temperature	25 °C
Storage environment	-25 ~ 50 °C




Dimensional Drawing (mm)


LED HC300 12W

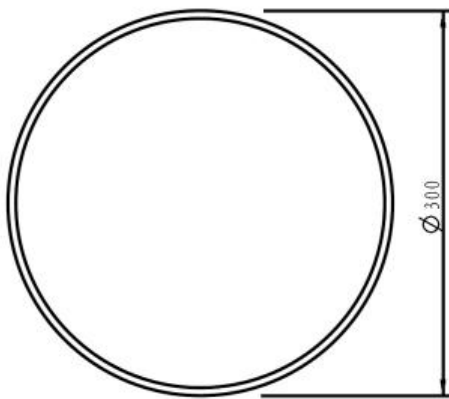

LED Apollo HC300 bracket



LED Module sensor CT

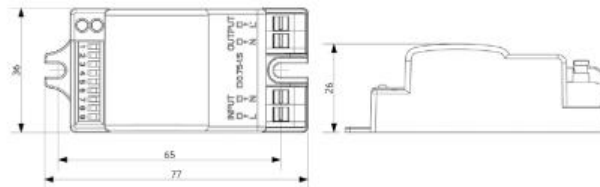

Photometric Data