



Linear EcoMax

- Easy to install LED linear solution
- Elegant but sturdy design: IP44 and IK06
- Comfortable light due to opal diffuser
- Central or side power connection



Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
542005039800	LEDLinear-E CL12-40W-4000-WH	TL 2x36W	40	4720	118	4000	2.80

Accessories



140060553
LED Module sensor CT

Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140060553	LED Module sensor CT	40x35x80	0.06	6945730491732	1
506006003100	LED Smart-Relay-500W	37x110x57	0.10	6956321820824	1
542005039800	LEDLinear-E CL12-40W-4000-WH	195x85x1255	3.25	6941497723437	1

Technical Specifications

Lifetime (L70)	70,000 h
Lifetime (L80)	50,000 h
On-/Off-cycles	100,000
Dimmability	On-Off
Beam angle	110°
Finishing	White RAL9003
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP44
Impact strength	IK06
Protection class	I
Risk group (EN 62471)	RG0
With control gear	Yes
Power factor	≥ 0.9

Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-240 V AC
DC input voltage	No

Mechanical Properties

Material housing	Steel
Optical material	PMMA

Ambient Conditions

Operating temperature	-10-+40°C
Application temperature	+25°C
Storage environment	-25-+50°C



ENERGY


OPPLE Lighting
542005039800

40
kWh/1000h

2019/2015

Dimensional Drawing (mm)

LEDLinear-E CL12

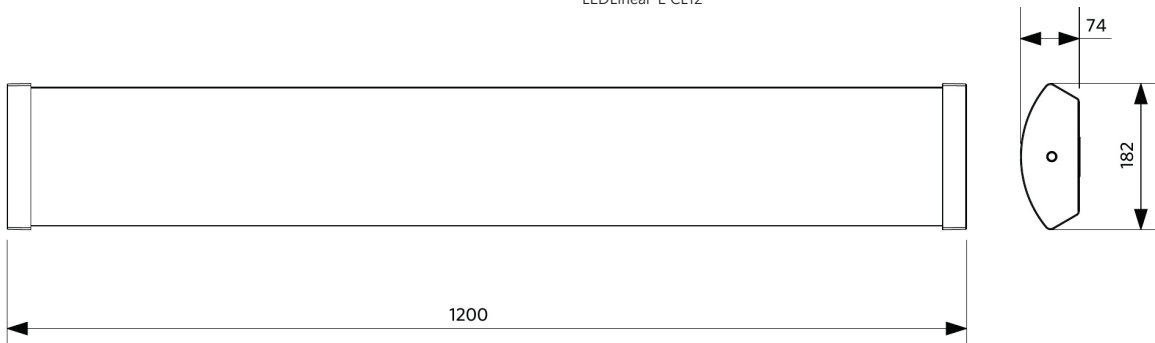

Photometric Data

