

## LED Ceiling Light Doris

- 2 in 1, ceiling light & recessed downlight
- Easy installation
- Uniform, diffused light, creating a pleasant atmosphere
- Provides instant light from the first second
- Warm white light
- Energy saving up to 80% in comparison to a traditional light source

**30,000 h**  
L70B50

**20,000 h**  
L80B50

## Specifications

Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Energy Level
140044151	LED HC230 14W 2700K Doris MW CT	GLS 100W	14	1200	86	2700	A

## Packaging Information

Item		Box			
Item Code	Item Description	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
140044151	LED HC230 14W 2700K Doris MW CT	270x105x270	0.96	6956321845018	1
140044151	LED HC230 14W 2700K Doris MW CT	560x230x560	9.00	6956321851651	8

### Technical Specifications


On-/Off-cycles	50,000
Dimmable	No
Beam angle	115 °
Finishing	Matte White
Colour rendering index CRI	≥ 80
Degree of protection (IP)	IP20
Protection class	II
Control gear included	No

### Electrical Supply

Frequency	50/60 Hz
Nominal voltage	220-228 V
Voltage type	AC


### Ambient Conditions

Operating temperature	-20 - 40 °C
Application temperature	25 °C
Storage environment	-25 - 50 °C




# Dimensional Drawing (mm)

LED HC230 14W

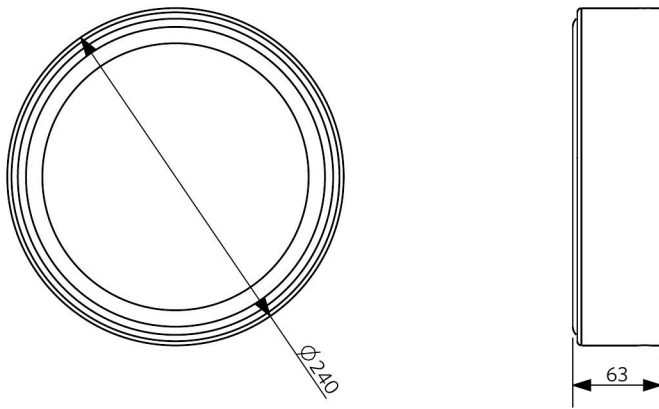

# Photometric Data

LED HC230 14W

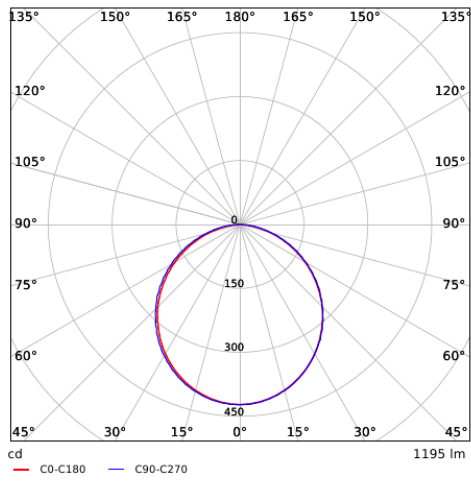

# Installation Opening Drawing (mm)

LED HC230 14W  
 $\varnothing 215$

